


Stitching Head

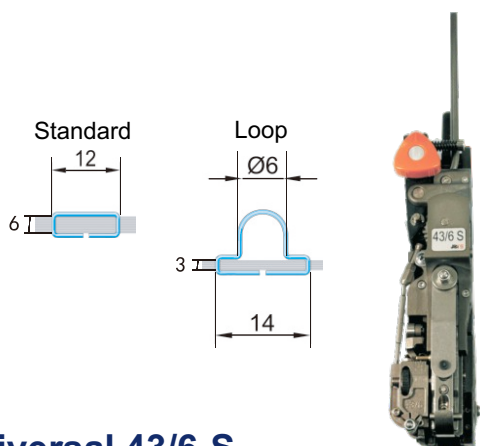

Universal 43/6-S


Compact, efficient and precise. Designed for environments with limited space, the Universal 43/6-S offers exceptional versatility and user-friendly features for efficient stitching operations.

Key Features

- Ultra-compact design with stitch centres reduced to just 43mm.
- Front-facing access for easy loading and operation.
- Tool-free wire length and cutting box adjustment for varying in a matter of seconds.
- Fast and simple conversion between standard and loop stitching with interchangeable parts.
- Supports up to 14.000 stitches per hour.
- New moisture-resistant parts with enhanced durability.

Specification

Parameter	Universal 43/6-S
Standard Stitching	
Max. Stitching Thickness	6mm
Min. Distance between Staples (Standard)	43 - 52mm
Crown Width	12mm
Round Wire	
No. 24-26 (0.6 - 0,5mm)	x
or No. 26-28 (0,5 - 0,4mm)	x
Optional Exchange Parts	
for Loop Stitching	x
Round Wire No. 24-26 (0.6 - 0.5mm)	x
Loop Stitching	
Inner Diameter of Loop	6mm (bzw)
Max. Stitching Thickness	3mm
Min. Distance between Staples	48 - 54mm
Optional Exchange Parts	
for Loop Stitching 6mm	x
for Loop Stitching 8mm	x
Round Wire	
No. 24-26 (0.6 - 0.5mm)	x
or No. 26-28 (0.5 - 0.4mm)	x

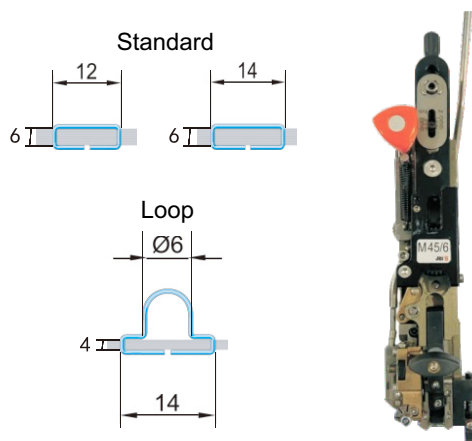

M45/6

Built for Compatibility The M45/6 is engineered to match or outperform traditional stitching heads, offering seamless integration with Muller Martini, Bielomatik, Osako, and Purlux saddle binders.

Key Features

- Universal replacement for Muller Martini HK 75, 55, and 45 heads.
- Toolless, quick and easy wire length and thickness adjustments.
- Supports stitching from 2 sheets to 6mm, up to 10.000/hour.
- Suitable for multiple applications due to its narrow design (45mm minimum between stitch distance centres).
- Left-centering device allows for the narrowest possible distance between stitch centres.

Specification

Parameter	M45/6
Max. Stitching Thickness	6mm
Distance between Staples (Standard)	45 - 54mm
Crown Width	12mm
Round Wire	
No. 24-26 (0.6 - 0.5mm)	x
or No. 26-28 (0.5 - 0.4mm)	x
or No. 23 (0.7mm)	x
Optional Stitching Head	
for Crown Width 14mm	x
Min. Distance between Staples	47 - 56mm